

**Features**

Individually addressed and controlled multi-candela V/O (visible only) notification appliances provide:

- Multi-candela xenon strobe with synchronized 1 Hz flash rate and with intensity *programmable from the control panel* or jumper selected as 15, 30, 75, or 110 cd
- Advanced addressable notification controlled by **IDNAC SLCs** providing *regulated 29 VDC* allowing strobes to operate with lower current even under battery backup
- Wiring supervision to each strobe allowing “T-tapped” connections for Class B circuits to simplify wiring (Class A circuits require in/out wiring)
- **TrueAlert Device Reports** at the control panel detailing appliance point ID, custom label, type, and candela setting (see sample on page 2)
- **Magnet test diagnostics** to assist checkout and testing of appliances and wiring
- Compatibility with ADA requirements
- Compatibility with legacy TrueAlert addressable systems for upgrade and replacement (see page 3)
- UL listed to Standard 1971\*

**LED indicator and magnet test feature:**

- Appliance LED can be selected to display each polling cycle to indicate appliance supervision
- In diagnostic mode, the magnet test pulses the LED to indicate appliance address *AND pulses to indicate the intensity selection*; a brief output of the strobe is also selectable to confirm operation

**Mechanical design features:**

- Rugged, high impact, flame retardant ceiling mount thermoplastic housings are white with red lettering
- Rear of housing does not extend into box and easily mounts to standard electrical boxes
- Mounting options include red wire guards and adapters for surface mounted electrical boxes

\* See page 2 for wire guard listings. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Safety Products Westminster.



Ceiling Mount Addressable V/O  
with Chinese/English Lettering

**Description****Multi-Candela TrueAlert addressable strobes**

provide convenient installation to standard electrical boxes. The strobe is individually addressed and individually controlled with power, supervision, and control supplied from a Simplex fire alarm control panel providing **IDNAC** Signaling Line Circuits (SLCs). (See compatibility list on page 3.)

**Strobe Application Reference**

Proper selection of visible notification is dependent on occupancy, location, local codes, and proper applications of: the *National Fire Alarm and Signaling Code* (NFPA 72), ANSI A117.1; the appropriate model building code: BOCA, ICBO, or SBCCI; and the application guidelines of the Americans with Disabilities Act (ADA).

**IDNAC SLC Operation Advantage****TrueAlert addressable appliances on IDNAC SLCs**

provide separate visible (and audible) notification using a single two-wire circuit that also *confirms connection to the individual notification appliance's electronic circuit*. This operation increases circuit supervision integrity by providing supervision that extends beyond the appliance wiring connections.

**Reduced current allows efficient IDNAC SLC operation.**

With **IDNAC SLCs**, a *constant 29 VDC* source voltage is maintained, even during battery standby, allowing strobes to operate at higher voltage with lower current and ensuring a consistent current draw and voltage drop margin under both primary power and secondary battery standby. Efficiencies include wiring distances up to 2 to 3 times farther than with conventional notification, or support for more appliances per IDNAC SLC, or use of smaller gauge wiring, or combinations of these benefits, all providing installation and maintenance savings with high assurance that appliances that operate during normal system testing will operate during worst case alarm conditions.

## IDNAC SLC Operation Advantage (Cont'd)

**Reducing Installation and Testing Time.** With separate controls on the same two-wire SLC, installation time and expense for both retrofit and new construction can be significantly reduced. When Class B wiring is used, *wiring can be "T" tapped*, allowing more savings in distance, wire, conduit (size and utilization), and overall installation efficiency. Use of the magnet test feature improves installation efficiency. TrueAlert device reports conveniently identify information about each connected appliance.

## TrueAlert Addressable Wiring Isolator

**Isolator Model 4905-9929** is available for remote mounting on TrueAlert addressable circuits to isolate short circuited wiring from functioning wiring. (Refer to data sheet S4905-0001 for additional information.)

## TrueAlert Addressable Diagnostics

**Test Features.** Controllers can be selected to pulse each appliance's LED when it receives a supervision poll. When the controller is selected for diagnostic mode, the appliance magnet test feature provides a response at the individual appliance being tested.

**Silent Appliance Magnet Test.** In this test mode, in response to the magnet test, the appliance LED pulses sequentially to conveniently indicate the appliance's address.

**Operational Appliance Testing.** In this test mode, after the address is indicated by pulsing the appliance LED, the strobe will briefly flash to indicate proper operation.

**TrueStart Instrument Two (TSIT).** The 2nd generation of the Simplex TrueStart Test Instrument adds testing of IDNAC SLC wiring and TrueAlert (and TrueAlert ES) appliances to its ability to test IDCs, NACs, and IDNet communications *before connection to the control panel*. Please contact your local Simplex representative for additional information.

## Product Selection

### Multi-Candela Ceiling Mount Addressable Strobe

Model	Housing Color	Red Lettering	Dimensions	Description
4906-9212	White	火FIRE ALARM 警	4 3/4" x 2 5/16" x 2 5/8" D (121 mm x 75 mm x 67 mm)	Multi-Candela Addressable Strobe; intensity selectable as: 15, 30, 75, or 110 candela

### V/O Adapters (see diagram on page 3)

Model	Description	Dimensions
4905-9910	Ceiling Mount, Surface Mount Adapter Plate, zinc plated; <b>required for ceiling surface mount</b>	4 7/8" x 3 1/8" (124 mm x 79 mm)

### Wire Guards (see diagram on page 3)


Model	Description	Dimensions
4905-9926*	Ceiling Mount Red wire guard with mounting plate, compatible with semi-flush or surface mounted boxes	6 1/8" x 4 3/8" x 2 7/8" (156 mm x 111 mm x 73 mm)

\* UL listed by Space Age Electronics Inc.

## TrueAlert Device Reports Reference

Service Port		Page 1	
REPORT 5 : TrueAlert Device Report		12:34:56am	TUE 27-Jan-15
POINT ID	CUSTOM LABEL	DEVICE TYPE	CANDELA
T14-1-1	Location Label . . . up to 40 characters	V/O	15
T14-1-2	Break Room 5	A/V	110
T14-1-3	Boiler Room	A/V	75
T14-1-4	Elec. Room 7	A/V	30

## Ceiling Mount V/O and Guard Installation Reference

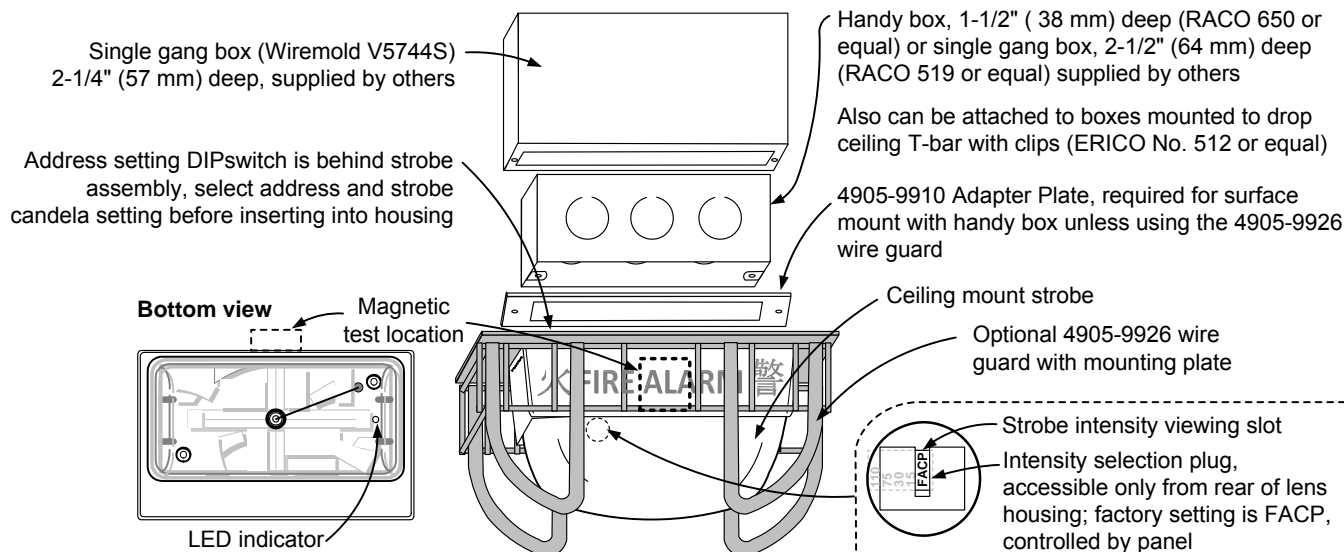

## IDNAC SLC Controller Compatibility Reference

Compatible Controllers	Data Sheet Reference	Controller Output	IDNAC SLC Output Voltage	Appliance Voltage Design Reference
4100ES with EPS+ or EPS Power Supply	S4100-0100	IDNAC SLC	29 VDC (regulated)	23 VDC (with 6 VDC drop)
4009 IDNAC Repeater	S4009-0004			
4007ES with IDNAC Notification	S4007-0002			
4010ES with ESS Enhanced System Supply	S4010-0011			

## Specifications

### General Specifications (see page 2 for dimensions)

Environmental	32° to 122° F (0° to 50° C); 10% to 93%, non-condensing at 100° F (38° C)
Connections	Terminal blocks for 18 AWG to 12 AWG (0.82 mm <sup>2</sup> to 3.31 mm <sup>2</sup> ); two wires per terminal for in/out wiring
Installation Instructions	579-808

### Strobe Specifications

Typical Operating Voltage Range	23 VDC to 31 VDC, Special Application (see below for 17 VDC rating)			
Supervisory Requirements	1 unit load (= 0.8 mA control panel current)			
Flash Rate and Synchronized SLC Loading	1 Hz; with up to 46 synchronized strobes maximum per NAC			
<b>Candela Setting</b>	<b>15 cd</b>	<b>30 cd</b>	<b>75 cd</b>	<b>110 cd</b>
<b>23 VDC</b> RMS Current Ratings, for connection to IDNAC Addressable SLCs	60 mA	92 mA	180 mA	240 mA

## TrueAlert Strobe LEGACY Compatibility Reference

Compatible Controller	Data Sheet Reference	Controller Output	Available Strobe Intensity	Appliance Voltage Minimum
4100ES or 4100U with TrueAlert Power Supply	S4100-0031	TrueAlert Addressable SLC	15, 30, 75, and 110 cd	<u>17 VDC</u>
4009 TPS, Remote TrueAlert Power Supply	S4100-0037			
TrueAlert Addressable Controller (4009T)	S4009-0003			

### Electrical Ratings Difference for Retrofit Applications

Voltage Range	17 VDC to 31 VDC, Special Application			
<b>Candela Setting</b>	<b>15 cd</b>	<b>30 cd</b>	<b>75 cd</b>	<b>110 cd</b>
<b>17 VDC</b> RMS Current Ratings, use when connected to TrueAlert Addressable SLCs per above	76 mA	128 mA	242 mA	328 mA

*TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. NFPA 72 and National Fire Alarm and Signaling Code are registered trademarks of the National Fire Protection Association (NFPA).*



Tyco Fire Protection Products • Westminster, MA • 01441-0001 • USA  
[www.simplex-fire.com](http://www.simplex-fire.com)

S4906CE-001-1 2/2015

© 2015 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.